


Silhouette Series SXP2 Passive Preamplifier

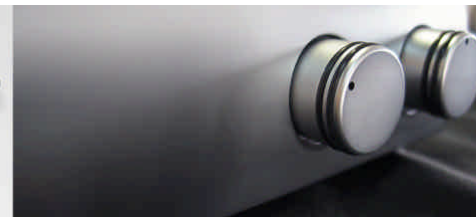

Your distributor is:

The Silhouette Series **SXP2** is a compact and stylish passive preamplifier and input selector. An entirely passive device, the **SXP2** contains no power supply or electronics to affect the audio signal. Ensuring noise levels remain at an absolute minimum and no sonic signature is imposed on the audio signal by the **SXP2**. This results in quiet, detailed, and dynamic reproduction of any audio signal. As with all Perreux products, the **SXP2** features the finest audiophile grade componentry. The styling of the **SXP2** is subtle and discreet, allowing seamless integration into existing systems or the perfect compliment to other products from the Perreux range.

- Entirely passive design • Audiophile quality ALPS potentiometer • Low noise floor • Excellent crosstalk performance • Optimal circuit and ground layout for improved noise floor and channel separation •
- Enhanced audio design featuring highest quality PCB and minimal internal wiring • Dual unbalanced preamp outputs for easy bi-amping • Unbalanced line level outputs for home theatre bypass • Compact • Stylish •



Total harmonic distortion:

typically 0.001% @ 1kHz
20Hz–20kHz <0.002%

Frequency response:

20Hz-20kHz +0dB, -0.05dB
5Hz-60kHz +0dB, -0.50dB

Input impedance: 10k Ohms

Gain Range: -93dB to 0dB

Crosstalk

Channel to channel @ 1kHz -120dB
Channel to channel @ 20kHz -98dB
Input to input @ 1kHz -120dB
Input to input @ 20kHz -97dB

Audio connections:

3 pairs RCA line inputs
2 pairs RCA pre-outs
1 pair RCA line-outs

Signal to noise ratio: 118dB (*unweighted*)

Channel tracking: 0.50dB

Potentiometer type: Audio log

Dimensions:

Width: 216mm (8.5")
Height: 58mm (2.3")
Depth: 172mm (6.8")

Net weight: 1.1kg (2.4lb)

For more details please visit our website:

www.perreux.com

